
Framing Information: 77H Corner (RS/LS) (DG+)



Framing Dimensions

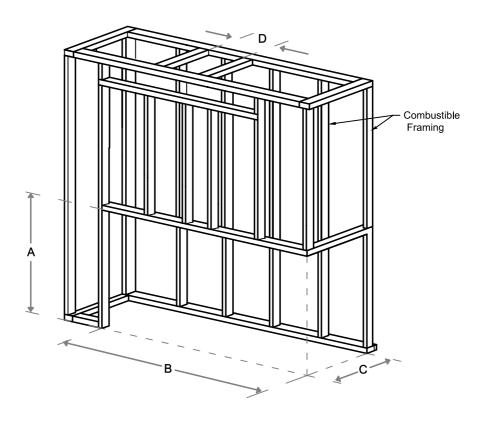

Model	АВ		С	D	
77H RS/LS	41 ¹ ½ ₁₆ "	87 ¾ ₁₆ "	1 22 37 11	Refer to Vent Manufacturer's Firestop Dimensions	

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Framing Information: 77H Corner (RS/LS) (DG+) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X ——/ Drywa**ll** on Framing Exterior 5/8" Type X Drywa**ll** on Framing Exterior Combustible Framing Section View Elevation View Air Intake (required for double glass only) Add drywall nailer as needed. The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale


2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Page 2 of 3


Framing Information: 77H Corner (RS/LS) (DG+)

Fireplace Dimensions

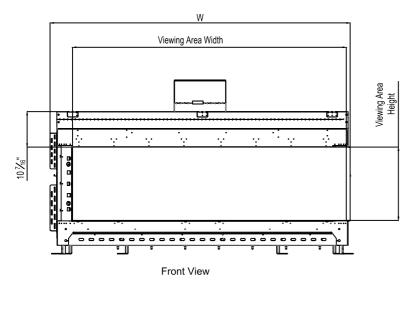



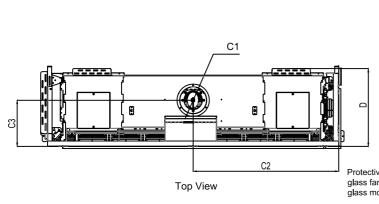



Model	(H) Height	(W) Width	(D) Depth	C1	C2	C3	Viewing Area	
							Front	Side
77H RS/LS	41 ¹ / ₁₆ "	87 ¾ ₁₆ "	22 ¾"	7 %"	42 %6"	13 ½"	80 ½° M X 21 ½° H	17½" W X 21 ½" H

Note: 1. Drawings are not to Scale

2. All dimensions in inches