
## Framing Information: 77HH Corner (RS/LS) (Double Glass)



## Framing Dimensions

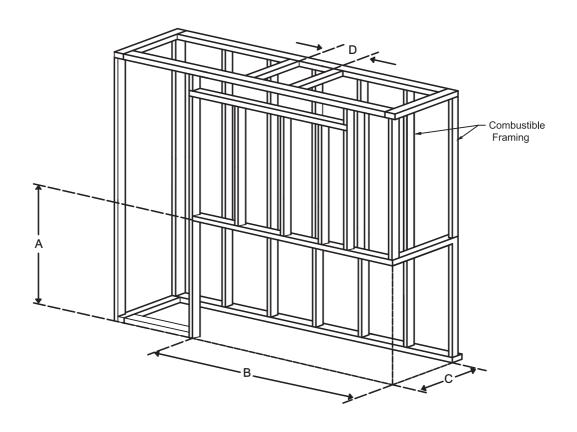

| Model      | Α     | В                                  | С     | D  |
|------------|-------|------------------------------------|-------|--|
| 77HH RS/LS | 49 ½" | 84 <sup>13</sup> / <sub>16</sub> " | 21 %" | Refer to Vent Manufacturer's Firestop Dimensions |

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

## Framing Information: 77HH Corner (RS/LS) (Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X — Orywall on Framing Exterior - 5/8" Type X Drywa**ll** on Framing Exterior Combustible Framing Section View Elevation View Air Intake ( required for double glass only) Add drywall nailer as needed. The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Page 2 of 3

## Framing Information: 77HH Corner (RS/LS) (Double Glass) **Fireplace Dimensions** W Heat Shield Viewing Area Width Articulation Joints Front View Side View Heat Shield C1 C2 Protective Cover for double-glass fans. Ships on double glass models only Top View (H) (W) (D) Viewing Area C2 Model C1 C3 Depth Height Width Front Side 84 13/16" 78 %" W X 29 ½" H $14^{13}/_{16}$ " W X $29^{1}/_{2}$ " H 49 ½" 21 %" 7 %" 41 %" 12 5/16" 77HH RS/LS

Note: 1. Drawings are not to Scale

2. All dimensions in inches