
## Framing Information: 60HH Front (Screen & Double Glass)



### Framing Dimensions

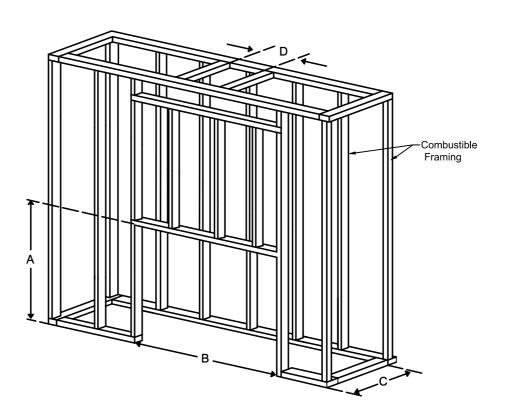

Model	А	В	С	D
60HH Front	49 ½"	69 ½"	21 %"	Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE

SELF-SUPPORTED.

# Framing Information: 60HH Front (Screen & Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X —— Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing ..%6 Air Intake **Elevation View** Section View (required for double glass only) Add drywall nailer as needed. The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale

2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Page 2 of 3


## Framing Information: 60HH Front (Screen & Double Glass)




### Fireplace Dimensions

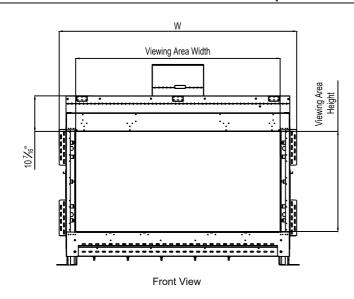

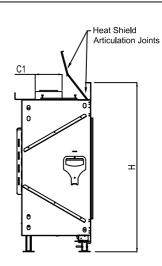

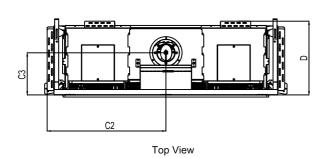

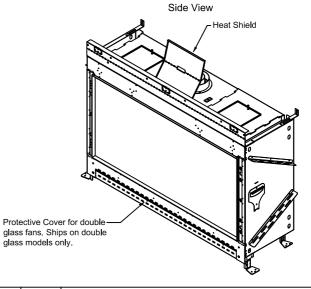

Model	(H)	(W)	(D)			Viewing Area		g Area
Wodel	Height	Width	Depth	01	02	Co	Front	Side
60HH Front	49 ½"	69 ½"	21 %"	7 %"	34 ¾"	12 ½6"	59 <sup>13</sup> / <sub>16</sub> " W X 29 ½" H	_

Note: 1. Drawings are not to Scale

2. All dimensions in inches