
## Framing Information: 77 Three Sided (TS) (Screen & Double Glass)



## Framing Dimensions

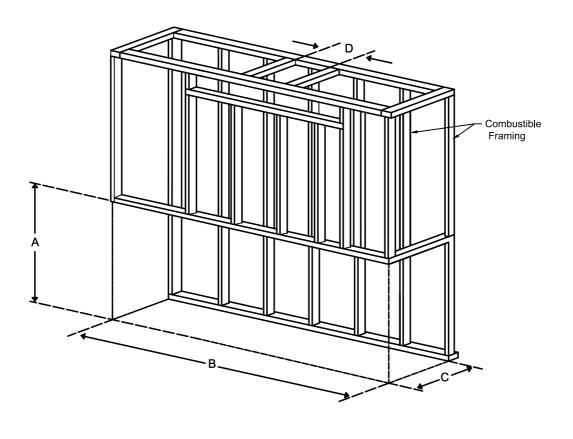

Model	А	В	С	D
77 TS	35 ¾"	35 ¾" 82 ¾"		Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

# Framing Information: 77 Three Sided (TS) (Screen & Double Glass) YOUR LIFE. YOUR FIRE Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing \_\_\_\_\_\_ Section View **Elevation View** Air Intake (required for double glass only) Add drywall nailer as needed. The valve can be moved Top View 36" from the center of the fireplace in any direction

Note: 1. Drawings are not to Scale

2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Page 2 of 3

## Framing Information: 77 Three Sided (TS) (Screen & Double Glass)





## **Fireplace Dimensions**

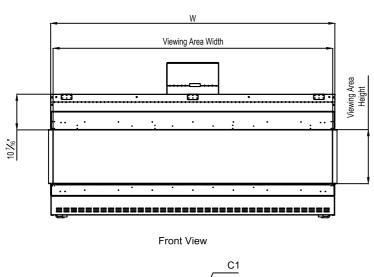



Side View

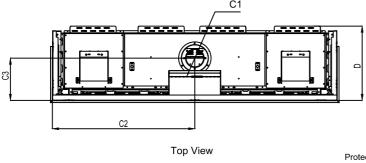

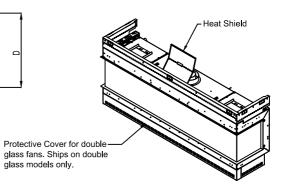

Model	(H)	(W)	(D)	C1	C2 C3			g Area
Wodel	Height	Width	Depth			00	Front	Side
77 TS	35 ¾"	82 ¾"	21 %"	7 %"	41 %"	12 ½6"	81 ½6" W X 15 ¾" H	14 <sup>13</sup> / <sub>16</sub> " W X 15 <sup>3</sup> / <sub>4</sub> " H

Note: 1. Drawings are not to Scale

2. All dimensions in inches