
Framing Information: 60H Corner (RS/LS) (Screen & Double Glass)



Framing Dimensions

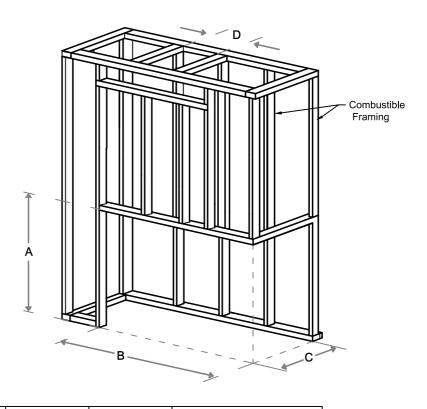

Model	Α	В	С	D
60H RS/LS	I RS/LS 41 11/16" 67 1/16"		045/11	Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Framing Information: 60H Corner (RS/LS) (Screen & Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X — Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing Section View Elevation View Add drywall nailer as needed. (required for double glass only) The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale


2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Framing Information: 60H Corner (RS/LS) (Screen & Double Glass)




Fireplace Dimensions





Front View



Side View







Model		C3	Viewin	Viewing Area				
Woder		Width	Depth		02		Front	Side
60H RS/LS	41 ¹ ½6"	67 ⁷ ⁄ ₁₆ "	21 %"	7 %"	32 %"	12 ½"	62 %" W X 21 %" H	14 ¹³ / ₁₆ " W X 21 ⁵ / ₈ " H

Note: 1. Drawings are not to Scale

2. All dimensions in inches