
## Framing Information: 60 Front (Screen & Double Glass)



### Framing Dimensions

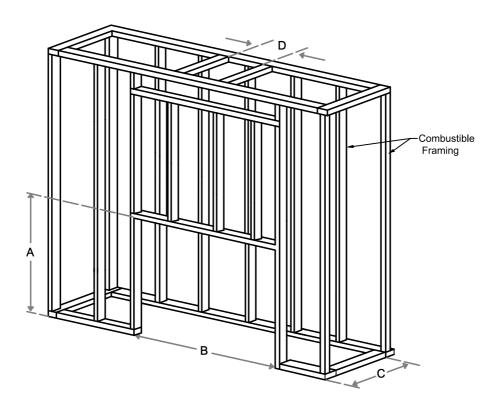

Model	A	В	С	D
60 Front	60 Front 35 ¾" 69 ¾6"		21 %"	Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

# Framing Information: 60 Front (Screen & Double Glass) YOUR LIFE. YOUR FIRE Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release 5/8" Type X Drywall on Framing Exterior . 5/8" Type X Drywa**ll** on Framing Exterior Combustible Framing 9%" Elevation View Section View Air Intake (required for double glass only) Add drywall nailer as needed. The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale


2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


## Framing Information: 60 Front (Screen & Double Glass)




#### **Fireplace Dimensions**

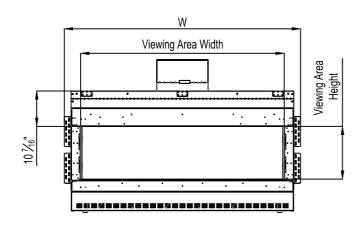


Front View



Side View





Model	(H) Height	(W) Width	(D) Depth	C1	C2	C3	Viewing Area	
Wodoi							Front	Side
60 Front	35 ¾"	69 <sup>7</sup> ⁄ <sub>16</sub> "	21 %"	7 %"	34 ½"	12 ½ <sub>16</sub> "	60 ½" W X 15 ¾" H	l

Note: 1. Drawings are not to Scale

2. All dimensions in inches