
Framing Information: 60H Front (Screen & Double Glass)



Framing Dimensions

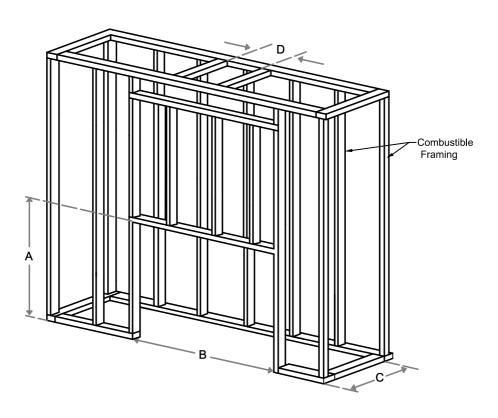

Model	А	В	С	D
60H Front	41 ¹ ½6"	69 ⁷ ⁄ ₁₆ "	21 %"	Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Page 1 of 3

Framing Information: 60H Front (Screen & Double Glass) YOUR LIFE. YOUR FIRE Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Rele Heat Release 5/8" Type X Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing Elevation View Section View (required for double glass only) Add drywall nailer as needed. The valve can be moved Top View 36" from the center of the fireplace in any direction

Note: 1. Drawings are not to Scale


2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Framing Information: 60H Front (Screen & Double Glass)




Fireplace Dimensions

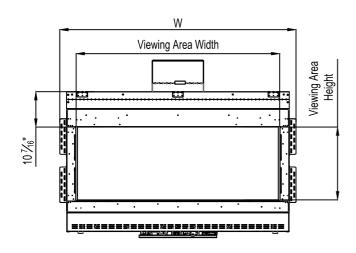


Front View



Side View





Model	(H)	(W)	(D)	C1	C2	C3	Viewing Area	
Wodel	Height	Width	Depth	<u> </u>	02)	Front	Side
60H Front	41 ¹ ½6"	69 ⁷ ⁄ ₁₆ "	21 %"	7 %"	34 ¹⁵ / ₁₆ "	12 ½6"	60 ½" W X 21 ½" H	_

Note: 1. Drawings are not to Scale

2. All dimensions in inches