
Framing Information: 68 Front (Screen & Double Glass)



Framing Dimensions

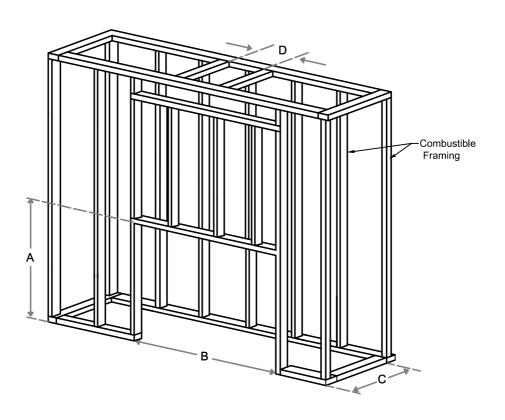

Model	А	В	С	D	
68 Front	35 ¾" 77 ⅙"		21 %"	Refer to Vent Manufacturer's Firestop Dimensions	

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Page 1 of 3

Framing Information: 68 Front (Screen & Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing — 95%" Elevation View Section View Air Intake (required for double glass only) Add drywall nailer as needed. The valve can be moved Top View 36" from the center of the fireplace in any direction

Note: 1. Drawings are not to Scale


2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Framing Information: 68 Front (Screen & Double Glass)




Fireplace Dimensions

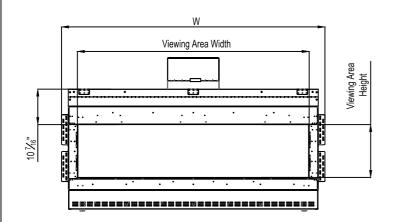


Front View



Side View

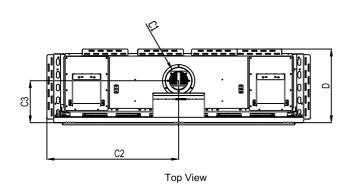

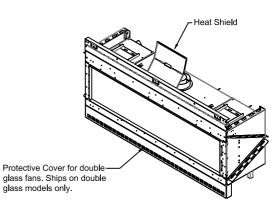

Model	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		C3					
Wodel	Height	Width	Depth	Ci	02	CS	Front	Side
68 Front	35 ¾"	77 ½6"	21 %"	7 %"	38 %"	12 ½6"	68 ½" W X 15 ¾" H	_

Note: 1. Drawings are not to Scale

2. All dimensions in inches