
Framing Information: 77H Three Sided (TS) (Screen & Double Glass)



Framing Dimensions

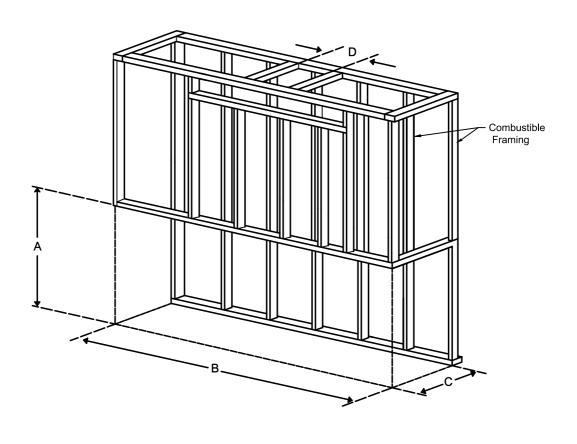

Model	А	В	С	D	
77H TS	41 ¹ ½6"	82 ¾"	21 %"	Refer to Vent Manufacturer's Firestop Dimensions	

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Framing Information: 77H Three Sided (TS) (Screen & Double Glass) **Framing Details** Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing _____ Elevation View Section View Air Intake (required for double glass only) Add drywall nailer as needed. Top View The valve can be moved 36" from the center of the fireplace in any direction

Note: 1. Drawings are not to Scale


2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Framing Information: 77H Three Sided (TS) (Screen & Double Glass)





Fireplace Dimensions

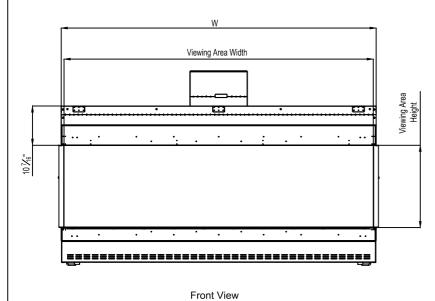



Front view

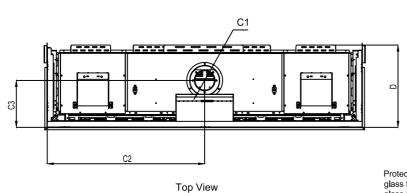



Model	(H) Height	(W) Width	(D) Depth	C1	C2	СЗ	Viewing Area	
Wodel							Front	Side
77H TS	41 ¹ ½6"	82 ¾"	21 %"	7 %"	41 %"	12 ½ ₆ "	81 ½6" W X 21 ½" H	14 ¹³ / ₁₆ " W X 21 ⁵ / ₈ " H

Note: 1. Drawings are not to Scale

2. All dimensions in inches